


NG200 120 Volt Plug-in
NG400 120 Volt Hardwire

FEATURES

- Easy installation mounting hardware included
- 6 foot drop cord and mounting plate included (NG200)
- Set to alarm before gas level reaches 25% of Lower Explosive Level
- Instant test feature
- Self diagnosing circuitry
- No batteries required
- 5 Year limited warranty

TECHNICAL SPECIFICATIONS

Detection Method: Semiconductor Sensing Technology
 Sensitivity: 15% of the Lower Explosive Level of natural gas
 Recommended Relative Humidity Range: 10 - 95%
 Measurement Frequency: Constant monitoring of the air
 Dimensions: 6.53 "W x 3.5 "H x 1.375 "D
 Power Supply: 120 volt at 7w Power Draw
 Recommended Operating Temperature Range: 40°F (4.4°C) to 100°F (38.8°C)
 Alarm Sound Level: 85dB
 Alarm Duration: Continuous - alarm is latched until unit is unplugged

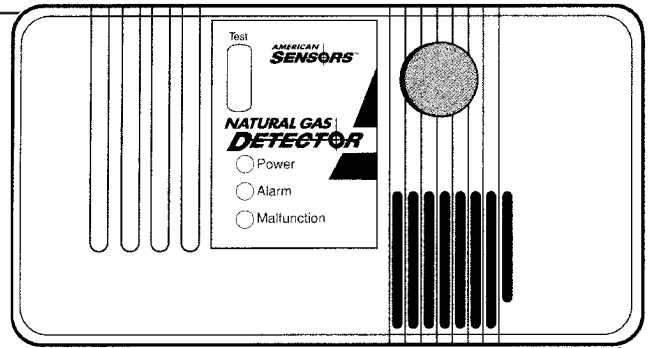

PACKING SPECIFICATIONS FOR 6X1 CASE PACK

Box Dimensions: 5.9 "W x 7.5 "H x 2.5 "D
 Case Dimensions: 6.5 "W x 8 "H x 16.25 "D

Item Order Number: NG200KC
 NG400
 Master Case Quantity of 6


LP200 120 Volt Plug-in
LP400 120 Volt Hardwire

FEATURES

- LP200 plugs into any standard AC outlet, 120 volt AC (60 Hz, 7 w)
- Easy installation mounting hardware included
- Set to alarm before gas level reaches 25% of Lower Explosive Level
- Instant test feature
- Self diagnosing circuitry
- No batteries required
- 5 Year limited warranty

TECHNICAL SPECIFICATIONS

Detection Method: Semiconductor Sensing Technology
 Sensitivity: 15% of the Lower Explosive Level
 Recommended Relative Humidity Range: 10 - 95%
 Measurement Frequency: Constant monitoring of the air
 Dimensions: 6.53 "W x 3.5 "H x 1.4 "D
 Power Supply: 120 volt (60 Hz, 7 w)
 Recommended Operating Temperature Range: 40°F (4.4°C) to 100°F (38.8°C)
 Alarm Sound Level: 85dB
 Alarm Duration: Continuous - alarm is latched until unit is unplugged

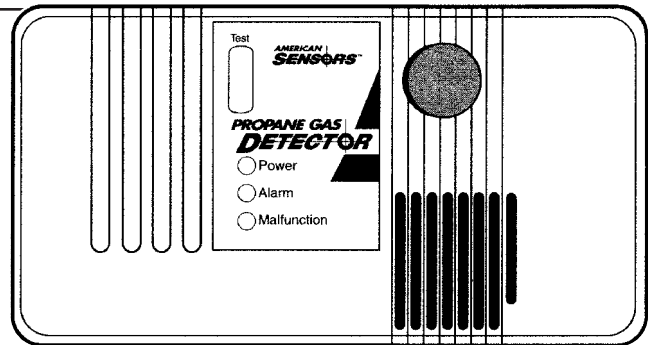

PACKING SPECIFICATIONS FOR 6X1 CASE PACK

Box Dimensions: 5.9 "W x 7.5 "H x 2.5 "D
 Case Dimensions: 6.5 "W x 8 "H x 16.25 "D

Item Order Number: LP2002KC
 LP400
 Master Case Quantity of 6

Dicon Global Inc.
 20 Steelcase Road West, Unit 3
 Markham, Ontario, Canada L3R 1B2
 905-475-6006 Fax: 905-475-8560
 info@diconglobal.com
 www.diconglobal.com

AMERICAN SENSORS™
 WE SAVE LIVES FOR A LIVING