


Photoelectric 120 Volt Hardwire with Built-in Relay 470LR

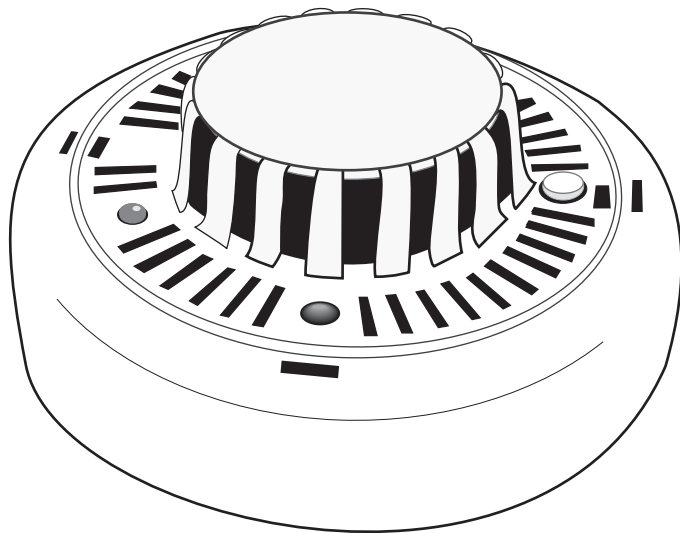

The American Sensors 470LR, 120 Volt hardwire smoke alarm with built-in relay is an all purpose smoke alarm incorporating advanced photoelectric technology. The built-in relay allows auxiliary devices to be signaled in an alarm condition, and the unit and contacts will automatically reset upon conclusion. Up to 18 units can be interconnected for simultaneous warnings. Photoelectric smoke alarms are most sensitive to particles produced from slow smoldering types of fires, and less likely to "nuisance" alarm from short exposures to heat or humidity commonly associated with false alarms.

FEATURES

- 120 volt hardwire with built-in "NO/NC Form C" relay
- Advanced Photoelectric sensing technology
- Automatic alarm reset feature
- Alarm source indicator
- Interconnectable up to 18 units
- Alarm and power test feature and LED's
- Tamper Resistant "Lock-it" key mounting hardware included
- 10 Year Limited Warranty
- Meets applicable standards



Item Order Number: SAAU-475A (U.S.A)
SAAC-470LRA (Canada)
Master Carton Quantity of 10

TECHNICAL SPECIFICATIONS

Voltage: 120 volt AC 60Hz
Interconnection: Up to 18 alarms
Alarm Sound Level: 85 dB at 10 feet (3 m)
Indicator Light: Green solid-state LED indicates alarm is receiving power
Dimensions: 5.25" (133 mm) x 2.2" (56 mm) (excluding base plate)

NORMAL OPERATING CONDITIONS

Temperature Range: 40°F (5°C) to 100°F (38°C)
Relative Humidity: 10% to 85%

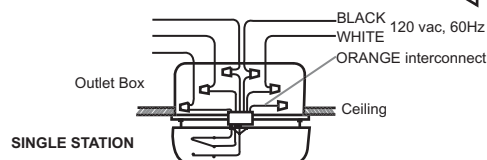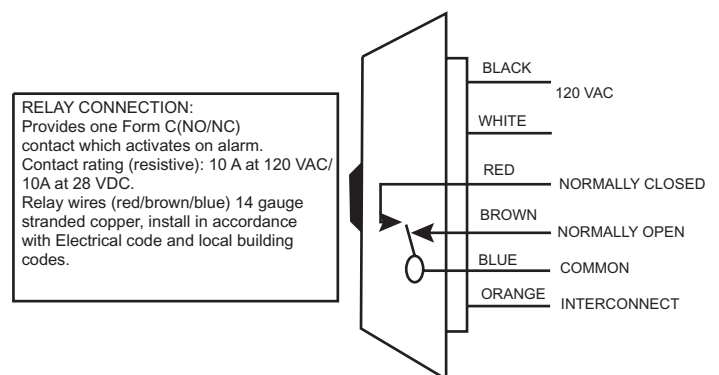

Dicon Global Inc.
20 Steelcase Road West, Unit 3
Markham, Ontario, Canada L3R 1B2
905-475-6006 Fax: 905-475-8560
info@diconglobal.com
www.diconglobal.com

**AMERICAN
SENSORS**

WE SAVE LIVES FOR A LIVING