


Photoelectric 12/24 Volt Hardwire with Built-in Relay ASD200

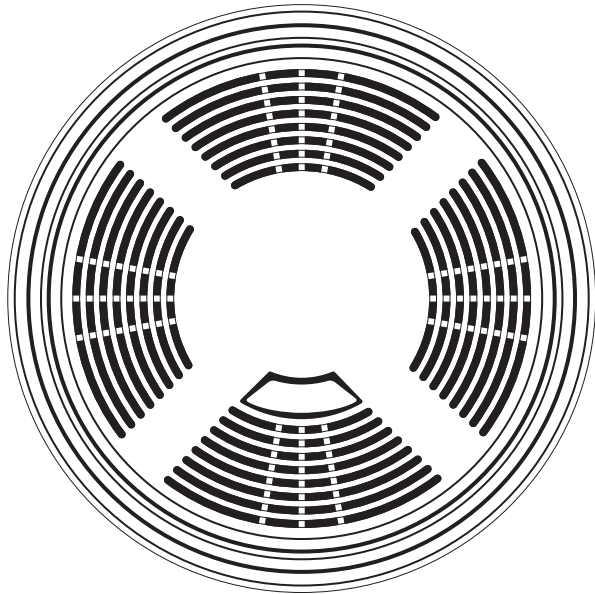

The American Sensors ASD200, 12/24 Volt AC or DC hardwire smoke alarm with built-in relay, is an all purpose "low voltage" smoke alarm incorporating advanced photoelectric technology for sensing visible and invisible particles of combustion. The built-in relay makes the ASD200 an easy choice for "system applications", where auxiliary devices are required. Up to 12 units can be interconnected for simultaneous warnings, and the built-in relay will automatically reset at the conclusion of an alarm condition.

FEATURES

- 12/24 volt AC or DC hardwire with built-in "NO/NC Form C" relay
- Advanced Photoelectric sensing technology
- Automatic alarm reset feature
- Alarm source indicator
- Interconnectable up to 12 units
- Alarm and power test feature and LED's
- Tamper Resistant "Lock-it" key mounting hardware included
- 10 Year Limited Warranty
- Meets applicable standards



Item Order Number: ASD200KA (Canada)
Master Carton Quantity of 10

TECHNICAL SPECIFICATIONS

Voltage: 12/24 volt AC or DC
Interconnection: Up to 12 alarms
Alarm Sound Level: 85 dB at 10 feet (3 m)
Indicator Light: Green solid-state LED indicates alarm is receiving power
Dimensions: 6.2" (146 mm) x 1.6" (45 mm) (excluding base plate)

NORMAL OPERATING CONDITIONS

Temperature Range: 40°F (5°C) to 100°F (38°C)
Relative Humidity: 10% to 85%

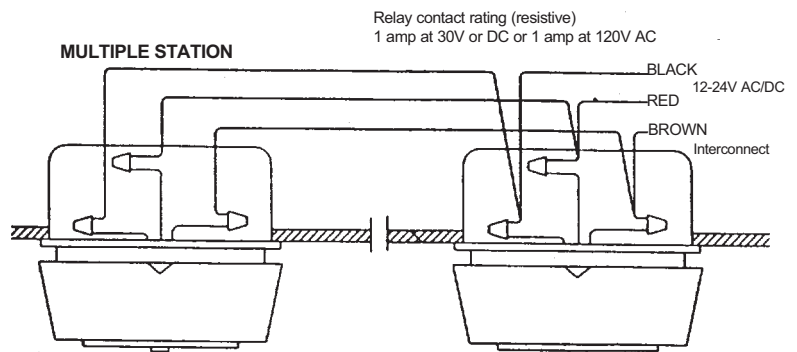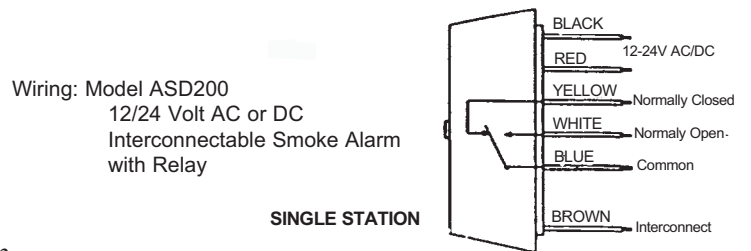

Dicon Global Inc.
20 Steelcase Road West, Unit 3
Markham, Ontario, Canada L3R 1B2
905-475-6006 Fax: 905-475-8560
info@diconglobal.com
www.diconglobal.com

**AMERICAN
SENSORS**

WE SAVE LIVES FOR A LIVING